

SETUP SHEET
LRP TC Masters
TRACK carpet

DATE 08.04.2001

NAME Masami Hirosaka


FRONT

LENGTH	59,7mm
OUTER SPACER	3mm
PISTON	#3
INNER SPACER	
SPRING	silver (YS-14525)
OIL	400

SHOCK END		
LONG	<input checked="" type="checkbox"/>	SHORT

SHOCK		
PLASTIC	<input checked="" type="checkbox"/>	ALUM

FRONT ROLL BAR		
<input checked="" type="checkbox"/>	YES	1.2mm

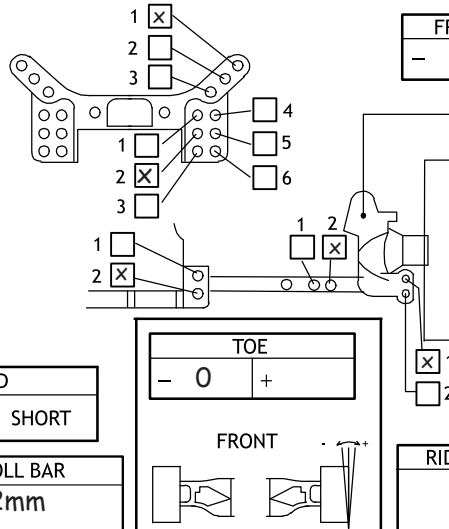

FRONT CAMBER		
-	0	+

CASTER BLOCK		
STANDARD 5 DEG		<input checked="" type="checkbox"/>
TEAM SUZUKI 3 DEG		
TEAM SUZUKI 5 DEG		
TEAM SUZUKI 7 DEG		

TIRE	
Control	HPI #4435

INNER FOAM	
JB Foam	blue

PART DESCRIPTION	STANDARD	GRAPHITE
BULKHEAD		<input checked="" type="checkbox"/>
SHOCK TOWER		<input checked="" type="checkbox"/>
LOWER ARMS	<input checked="" type="checkbox"/>	
CASTER BLOCKS	<input checked="" type="checkbox"/>	
STEERING BLOCKS	<input checked="" type="checkbox"/>	

RIDE HEIGHT	
5.0	mm

REAR


LENGTH	60.0mm
OUTER SPACER	2mm
PISTON	#3
INNER SPACER	
SPRING	silver
OIL	400

SHOCK END		
LONG	<input checked="" type="checkbox"/>	SHORT

SHOCK		
PLASTIC	<input checked="" type="checkbox"/>	ALUM

REAR ROLL BAR		
<input checked="" type="checkbox"/>	YES	1.2mm

TOE-IN BLOCKS		
0	<input checked="" type="checkbox"/>	2

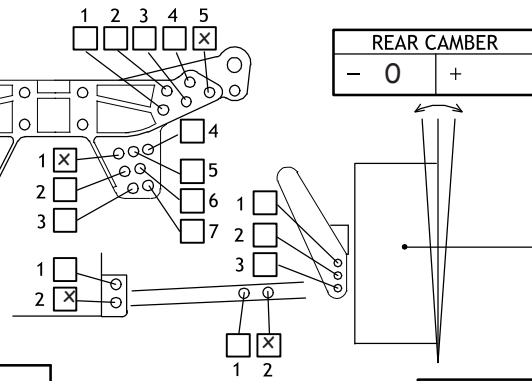

REAR CAMBER		
-	0	+

PART DESCRIPTION	STANDARD	GRAPHITE
BULKHEAD		<input checked="" type="checkbox"/>
SHOCK TOWER		<input checked="" type="checkbox"/>
LOWER ARMS	<input checked="" type="checkbox"/>	

TIRE	
Control	HPI #4435

INNER FOAM	
JB Foam	Blue

RIDE HEIGHT	
5.0	mm

CHASSIS		
	STANDARD CHASSIS (TC)	
<input checked="" type="checkbox"/>	GRAPHITE SLOTTED CHASSIS (TC PRO)	SPECIAL
	STANDARD SLOTTED CHASSIS (TC R)	

BODY	
Yokomo Stratus	

CENTER BRACE		
	STANDARD	GRAPHITE
<input checked="" type="checkbox"/>	SINGLE PIECE UPPER DECK	

WING	
Yokomo 180mm	

MOTOR		
TURN		WIND
12		2

FRONT DRIVE		
DIFF	<input checked="" type="checkbox"/>	ONE-WAY

GEAR RATIO			
PINION		SPUR	
22	T	78	T

CENTER DRIVE		
DIRECT	<input checked="" type="checkbox"/>	ONE-WAY

BATTERIES	
Reedy P3000	

SPEED CONTROL	
GM V12 XC	

TRACTION ADDITIVE	
LRP Top Traction (control)	

COMMENTS:

Motor: Reedy Ti (12turn motor limit)
Wheels: Yokomo Aero Dish 26mm

- milled upper deck
- servo mounted horizontally
- new rear arms used (ZS-008RW)

- 5mm minimum ride height rule
(4.0mm front and 4.5mm rear is std. setting)